




- Protective-decorative coating
- Washed gravel, fraction 2-5 mm
- Drainage membrane with geotextile
- Extruded polystyrene foam
- TECHNONICOL CARBON PROF 300
- Heat-treated needle-punched geotextile 300 g/sq.m
- Underlay waterproofing bitumen membrane
- Underlay waterproofing bitumen membrane
- Bitumen primer
- TECHNONICOL No. 01
- Reinforced sand-cement screed
- Sloping of expanded clay gravel
- Reinforced concrete foundation

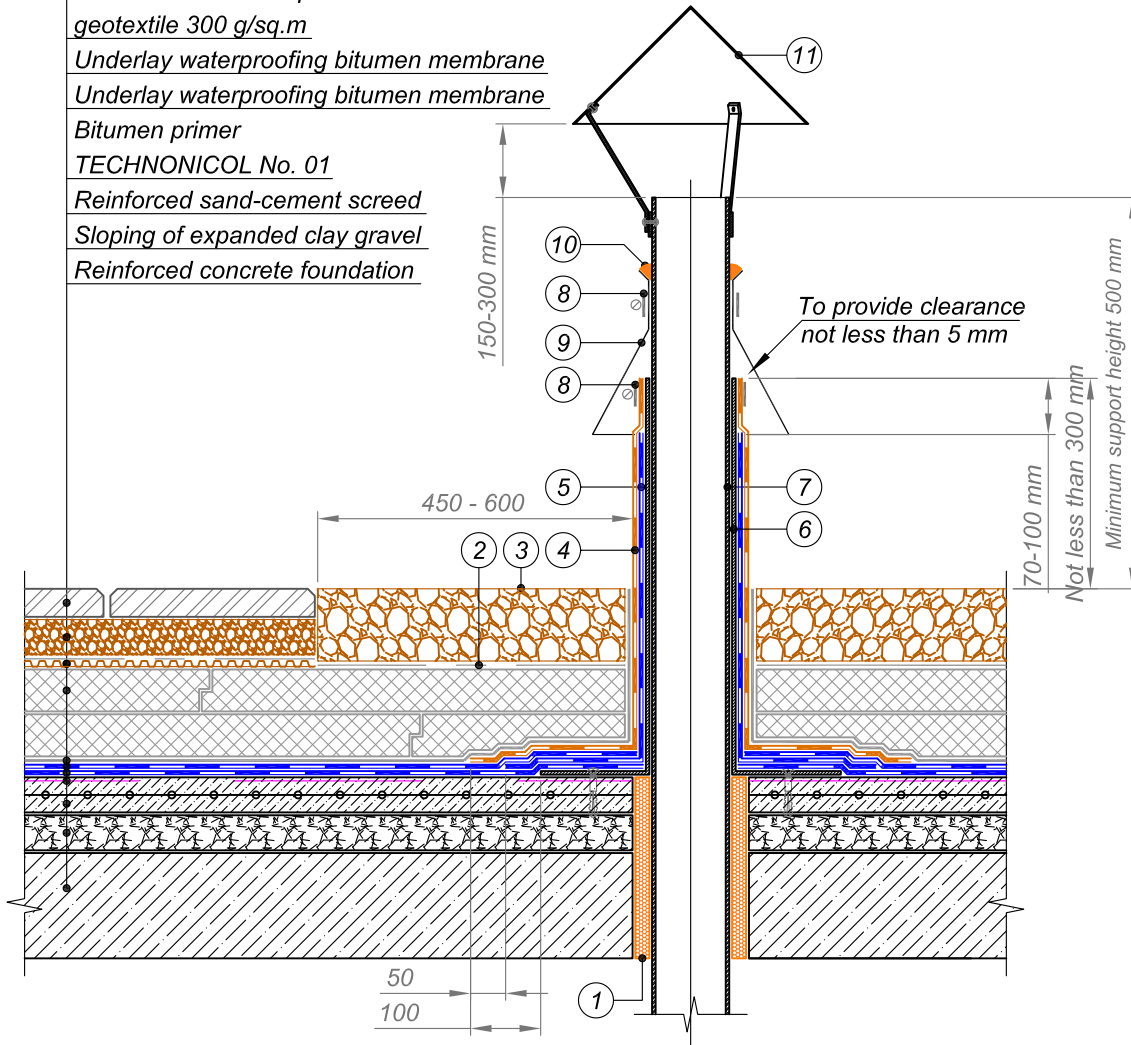

- | | |
|--|--|
| ① Sealing foam | ⑥ Galvanized steel sleeve
not less than 1 mm in thickness |
| ② Heat-treated needle-punched
geotextile 150 g/sq.m | ⑦ Pipe |
| ③ Washed gravel | ⑧ Compression metal clamp |
| ④ Cap sheet bitumen membrane | ⑨ Metal rain collar |
| ⑤ Underlay bitumen membrane | ⑩ Sealing mastic |
| | ⑪ Roof cowl |

NOTES

The solution is used for single cold pipes up to 250 mm in diameter, anchors, antenna bracings

				TERRACE WITH DRAINAGE	DESIGN	APPROVED
					SCALE	DATE
REV.	DATE	DESCRIPTION	CHECKED	JUNCTION TO COLD PIPE	DWG No.	REV.