




Plant substrate with green planting
Drainage membrane with geotextile
Heat-treated needle-punched geotextile 150 g/sq.m
Extruded polystyrene
TECHNONICOL CARBON PROF 300
Heat-treated needle-punched geotextile 300 g/sq.m
Anti-root bitumen membrane
Underlay bitumen membrane
Bitumen primer
TECHNONICOL No. 01
Reinforced sand-cement screed
Sloping of expanded clay gravel
Reinforced concrete foundation

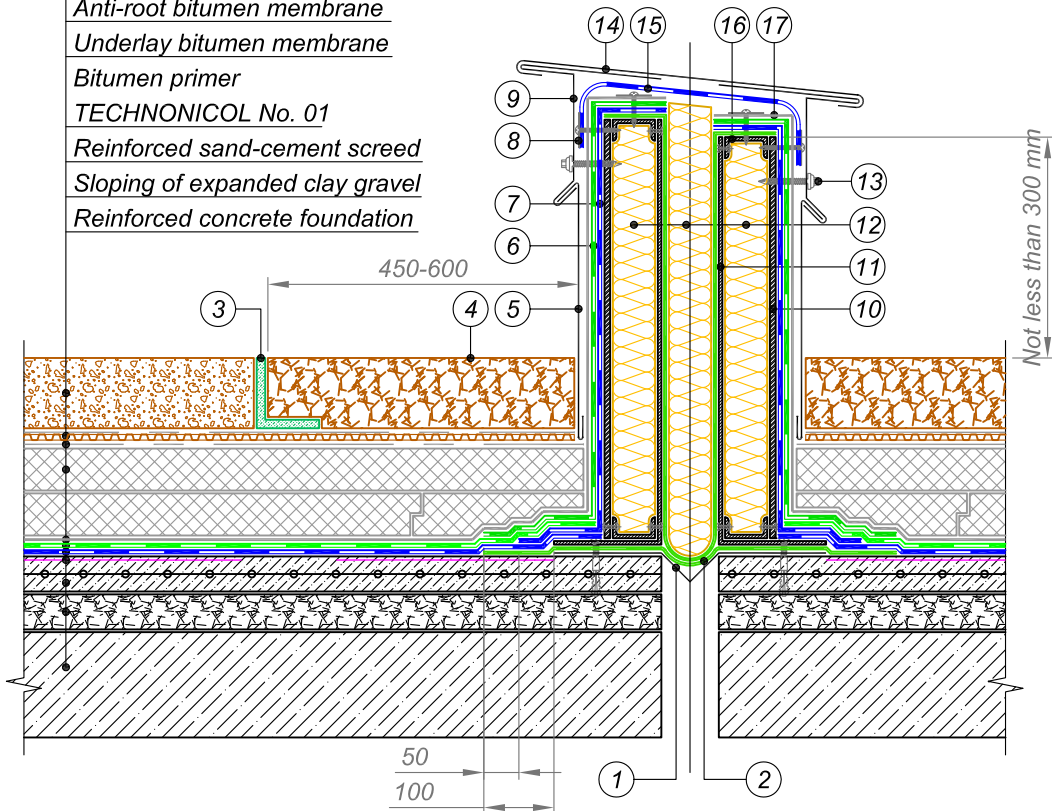

- | | |
|--|--|
| <ul style="list-style-type: none"> ① Galvanized steel compensator to be fastened from one side at 600 mm intervals ② Vapour barrier ③ L-shaped plastic element ④ Washed gravel ⑤ Removable metal flashing ⑥ Cap sheet bitumen membrane ⑦ Underlay bitumen membrane ⑧ Fasten by self-tapping screws with washer Ø 50 mm at 250 mm intervals ⑨ Fastening element ⑩ CBPB or ACB | <ul style="list-style-type: none"> ⑪ Galvanized steel profile not less than 3 mm in thickness ⑫ Stone wool thermal insulation ⑬ Fasten by roofing self-tapping screws with EPDM gasket ⑭ Coating of galvanized sheet ⑮ Roofing material flashing ⑯ Galvanized steel profile to be fastened by rivets ⑰ Vapour barrier material for fixation of insulation |
|--|--|

				GREEN ROOF	DESIGN	APPROVED
					SCALE	DATE
REV.	DATE	DESCRIPTION	CHECKED	EXPANSION JOINT AT JUNCTION TO WALL	DWG No.	REV.