




Variant with mastic

- Backfill soil
- Profiled drainage membrane with geotextile
- Extruded polystyrene CARBON PROF 300
- Underlay waterproofing bitumen membrane - 2 layers
- Bitumen primer TechnoNICOL No. 01
- Foundation wall

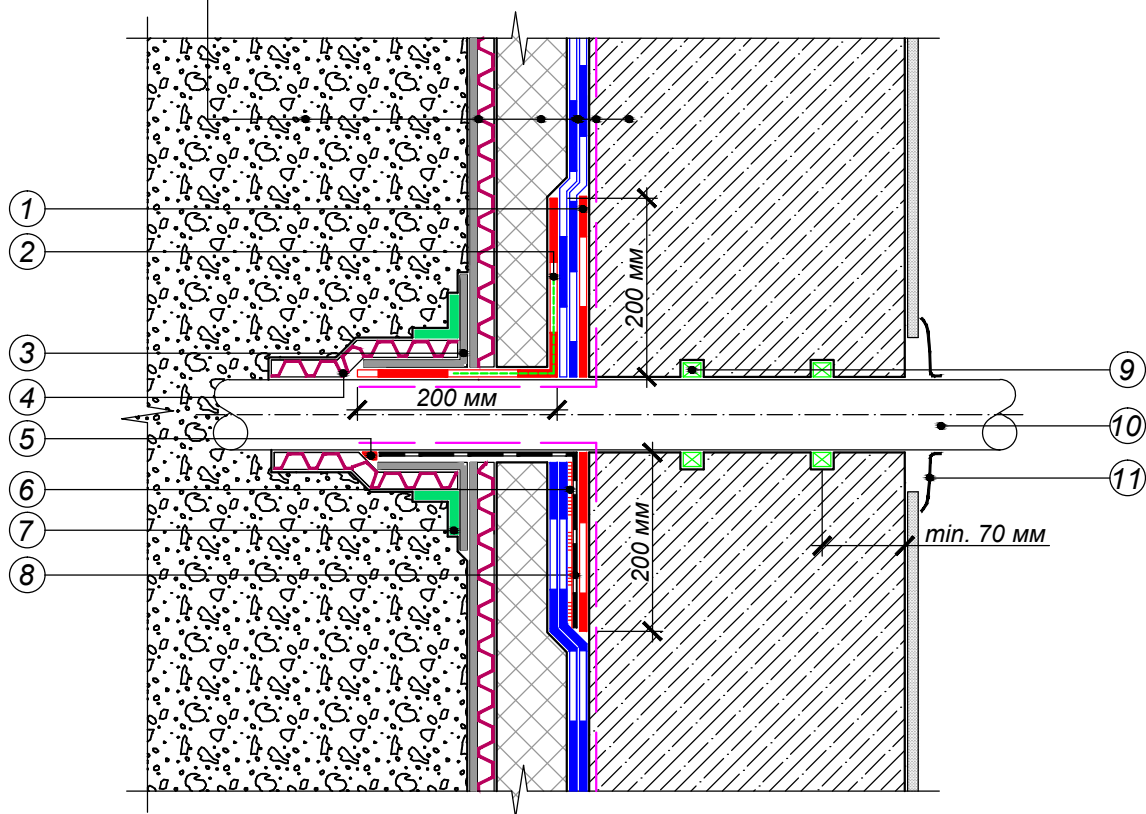

Variant with flexible sealing element

- |  |                                       |
|--|---------------------------------------|
| ① Strengthening layer - Underlay bitumen membrane  | ⑥ Treat with mastic                   |
| ② Fiber-glass fabric reinforced mastic TechnoNICOL | ⑦ NICOBAND self-adhesive sealant tape |
| ③ Geotextile **                                    | ⑧ Flexible sealing element*           |
| ④ Strip of drainage membrane around pipe*          | ⑨ Swelling cord                       |
| ⑤ Polyurethane sealant TechnoNICOL                 | ⑩ Pipe                                |
|  | ⑪ Internal coupling                   |

\*-additionally fixed with clamps

\*\* -with dimensions 100\*100 mm

				FOUNDATION WITH DRAINAGE	DESIGN	APPROVED
				CONSTRUCTION OF PIPE PENETRATIONS	SCALE	DATE
REV.	DATE	DESCRIPTION	CHECKED		DWG No.	REV.