




Plant substrate with green planting  
Drainage membrane with geotextile  
Heat-treated needle-punched geotextile 150 g/sq.m  
Extruded polystyrene  
TECHNONICOL CARBON PROF 300  
Heat-treated needle-punched geotextile 300 g/sq.m  
Anti-root waterproofing bitumen membrane  
Underlay waterproofing bitumen membrane  
Bitumen primer TECHNOCOL No. 01  
Reinforced sand-cement screed  
Sloping of expanded clay gravel  
Reinforced concrete foundation

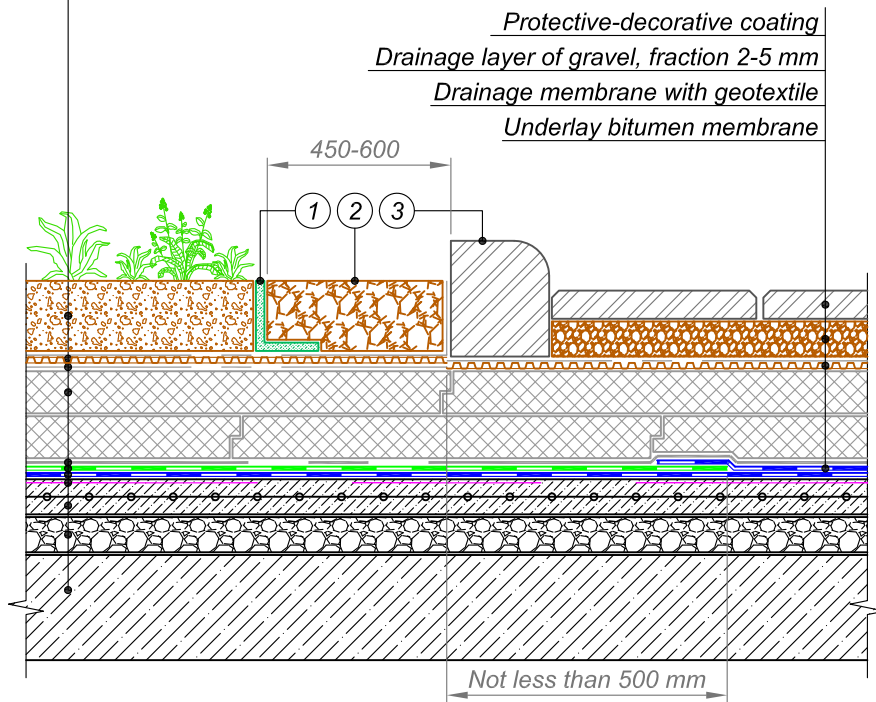

- ① L-shaped plastic element
- ② Washed gravel
- ③ Kerb stone

**NOTES**

\* Anti-root waterproofing bitumen membrane to be taken up on the roof section using another roofing system by the amount of not less than 500 mm

				GREEN ROOF	DESIGN	APPROVED
				CONJUGATION WITH PEDESTRIAN AREA	SCALE	DATE
REV.	DATE	DESCRIPTION	CHECKED		DWG No.	REV.