






Cap sheet torch-on bitumen membrane
Underlay torch-on bitumen membrane
Bitumen primer TECHNOCOL No. 01
Reinforced sand-cement screed
Sloping of expanded clay gravel
Extruded polystyrene
TECHNOCOL CARBON PROF 300
Vapour barrier
Reinforced concrete foundation

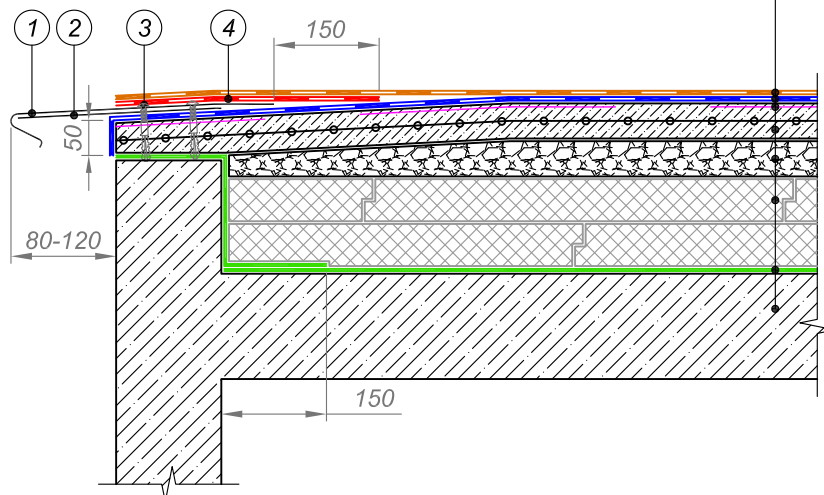

Galvanized steel drip edge

T-shaped fastening element

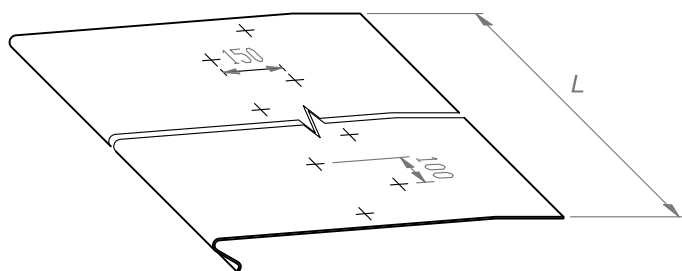

- ① Galvanized steel drip edge
(section length L not more than 4000 mm)
- ② T-shaped fastening elements
to be placed at 600 mm intervals

- ③ Fastening by self-tapping screws
at 100 mm intervals with staggered arrangement
- ④ Additional layer of underlay waterproofing
bitumen membrane

				EXPOSED FLAT ROOF	DESIGN	APPROVED
				EXTERNAL FREE-WATER DRAIN	SCALE	DATE
REV.	DATE	DESCRIPTION	CHECKED		DWG No.	REV.