




Protective-decorative coating  
Washed gravel, fraction 2-5 mm  
Drainage membrane with geotextile  
Extruded polystyrene  
TECHNONICOL CARBON PROF 300  
Heat-treated needle-punched  
geotextile 300 g/sq.m  
Underlay waterproofing bitumen membrane  
Underlay waterproofing bitumen membrane  
Bitumen primer TECHNOMICOL No. 01  
Reinforced sand-cement screed  
Sloping of expanded clay gravel  
Reinforced concrete foundation

Plant substrate with green planting  
Drainage membrane with geotextile  
Heat-treated needle-punched  
geotextile 150 g/sq.m  
Anti-root waterproofing bitumen membrane

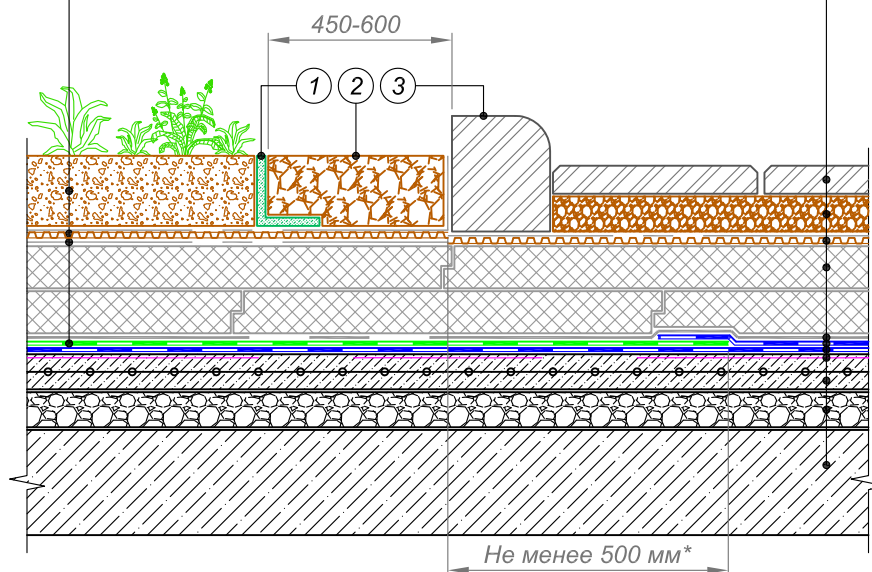

- ① L-shaped plastic element
- ② Washed gravel
- ③ Kerb stone

**NOTES**

\* Anti-root waterproofing bitumen membrane to be taken up on the roof section using another roofing system by the amount of not less than 500 mm

|      |      |             |         | TERRACE WITH DRAINAGE            |          |
|------|------|-------------|---------|----------------------------------|----------|
|      |      |             |         | DESIGN                           | APPROVED |
|      |      |             |         | SCALE                            | DATE     |
|      |      |             |         | CONJUGATION WITH PEDESTRIAN AREA |          |
| REV. | DATE | DESCRIPTION | CHECKED | DWG No.                          | REV.     |