




Cap sheet torch-on bitumen membrane
Underlay torch-on bitumen membrane
Bitumen primer TECHNOMICOL No. 01
Reinforced sand-cement screed
Sloping of expanded clay gravel
Extruded polystyrene
TECHNONICOL CARBON PROF 300
Vapour barrier
Reinforced concrete foundation

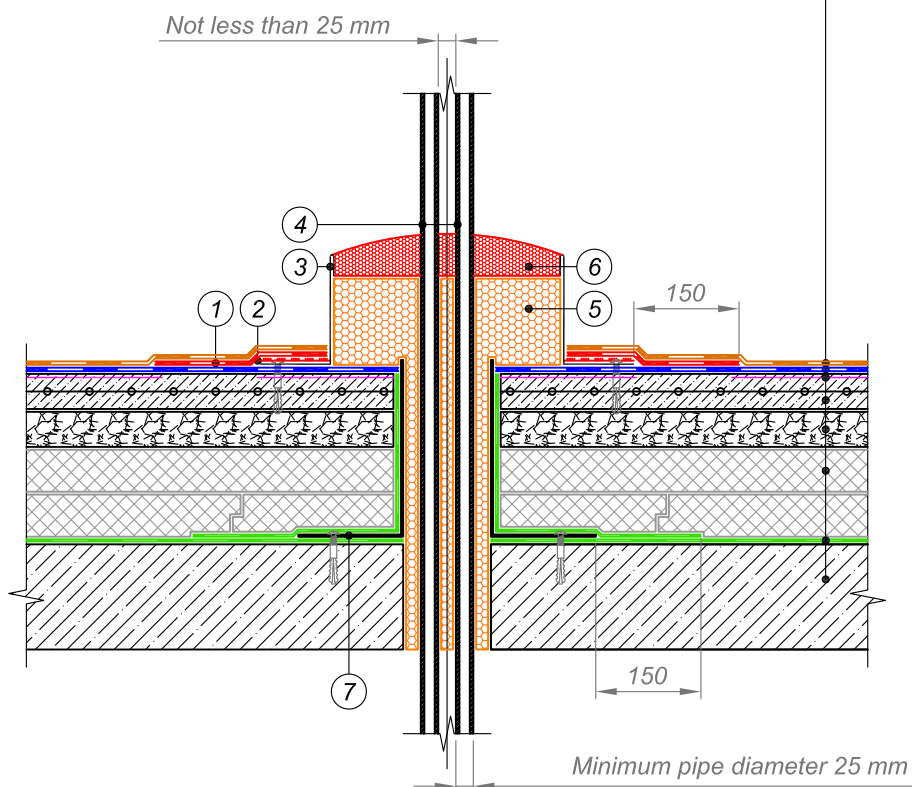

- | | |
|---|---|
| ① Additional layer of waterproofing membrane -
Underlay bitumen membrane | ④ Pipe bundle |
| ② Hot roofing mastic | ⑤ Sealing foam |
| ③ Watertight sleeve (minimum height 100 mm)
to be fastened by self-tapping screws
to screed, sleeve flange width 100 mm | ⑥ Two-component
bitumen-polyurethane sealant |
| | ⑦ Metal sleeve |

				EXPOSED FLAT ROOF	DESIGN	APPROVED
				JUNCTION TO COLD PIPES BUNDLE. VARIANT 1	SCALE	DATE
REV.	DATE	DESCRIPTION	CHECKED		DWG No.	REV.